

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 October 2004 (21.10.2004)


PCT

(10) International Publication Number
WO 2004/091178 A1

- (51) International Patent Classification⁷: H04M 1/00, 11/00
- (21) International Application Number: PCT/AU2004/000478
- (22) International Filing Date: 8 April 2004 (08.04.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 2003901703 10 April 2003 (10.04.2003) AU
- (71) Applicant (for all designated States except US): COOPER COMMUNICATIONS PTY LTD [AU/AU]; 14 Barkala Crt, Ocean Shores, New South Wales 2483 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): COOPER, Steven [AU/AU]; 14 Barkala Crt, Ocean Shores, New South Wales 2483 (AU).
- (74) Agent: PIZZEYS PATENT AND TRADE MARK ATTORNEYS; Level 14, ANZ Centre, 324 Queen Street, Brisbane, Queensland 4000 (AU).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: VOICE MULTI-TAP APPARATUS

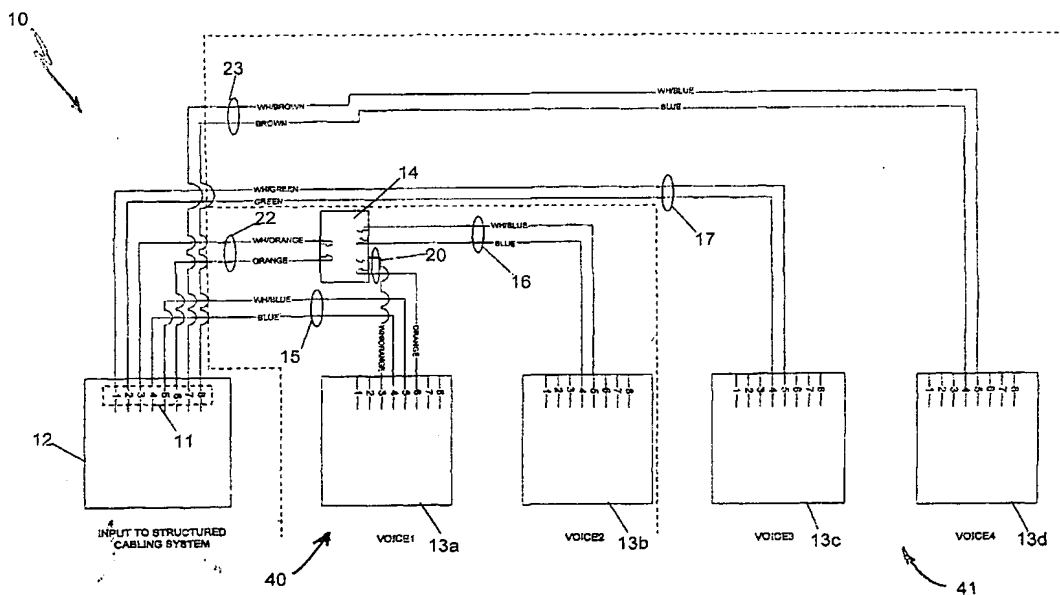

(57) Abstract: A voice multi-tap apparatus for a communications system, the apparatus including an input connector (12) accommodating at least four input circuits, plurality of output connectors (13a-13d) incorporating respective output circuits coupled to respective input circuits; and at least one of said output connectors incorporating a second output circuit coupled to one of the input circuits via a switching device (14) whereby the operation of said switching device allows said at least one output connector service two circuits.



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.